


120S


Lumens 840 lm/m
 Power Usage 9.5 W/m
 CRI 93 CRI ^{TRU} COLOUR

loomi
 Looking good!

PRODUCT IMAGE

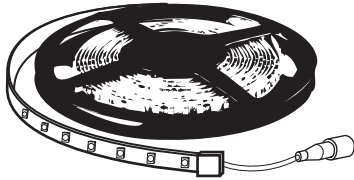

DIMENSION

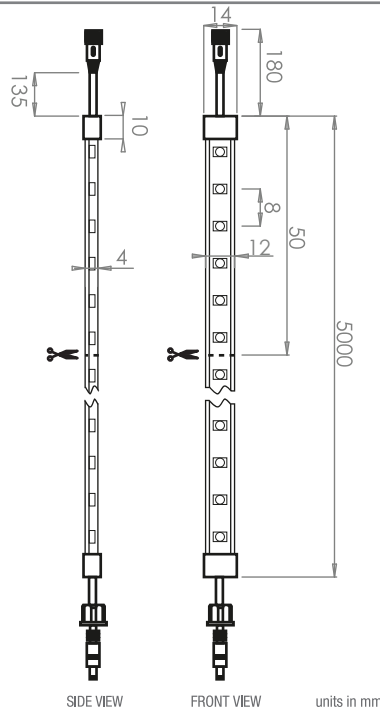

PRODUCT CODE	Unit	Col. Temp	Beam Ang.	Colour
120S		3K	120	C (clear)

SPECIFICATIONS

Physical	
Body Colour	White
Weight	0.02kg
Supplied Length	5m
LED Qty	120 LED/m
Operational	
Colour Temperatures	3000k
Beam Angles	120°
Lumens	840 lm/m
Efficacy	88.4 lm/W
Light Quality	CRI 93 ^{TRU} COLOUR
Operating temp	0-40°C
Lifetime	30,000 hrs
Warranty	3-year warranty

INSTALLATION

STEP 1

- If needed cut the strip to length on the closest cut line
- Realign the end cap with silicone glue

STEP 2

- Unscrew the cap off the driver and wire the strip into the driver using the terminal block.

STEP 3

- If needed attach extra lengths onto the wired strip using the plug and screw attachment

STEP 4

- Peel the adhesive and mount to the desired surface.
- If extra support is needed use the plastic brackets included in the packaging

Electrical	
Input Voltage	12 Vdc
Power Usage	9.5W/m
IP Rating	IP67
Dimming Range	5-100% Triac - Trailing

Driver Options						
Model	Watt	AC Input	IP Rating	PF	Weight	Advised Strip Length
LMSD30	30W	220-240V	20	0.9	0.75kg	1 - 3m
LMSD80	80W	220-240V	66	0.9	1.2kg	2 - 8m
LMSD150	150W	220-240V	66	0.6	1.5kg	7 - 15m

Driver Dimensions		
LMSD30	LMSD80	LMSD150
180x 60x 35mm	200x 70x 46mm	230x 70x 46mm

Photometrics

