

FRONIUS IG TL TRANSFORMERLESS INVERTER

/ Best in class with system monitoring as standard.



/ Module Manager

/ PC board
replacement concept

/ Mounting system



/ Ventilation concept



/ The Fronius IG TL combines all the benefits of a transformerless inverter with the high level of innovation and quality expected of Fronius. With power categories ranging from 3 to 5 kW, the Fronius IG TL is perfect for systems of any size from detached houses to agricultural or commercial premises. Standard system monitoring makes it the most future-proof transformerless inverter on the market, and the one that will produce the most reliable yield.

TECHNICAL DATA: FRONIUS IG TL

INPUT DATA	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
DC maximum power at $\cos \varphi = 1$	3,130 W	3,840 W	4,190 W	4,820 W	5,250 W
Max. input current ($I_{dc \max}$)	8.8 A	10.8 A	11.8 A	13.5 A	14.7 A
Min. input voltage ($U_{dc \min}$)			350 V		
Feed-in start voltage ($U_{dc \text{ start}}$)			350 V		
Nominal input voltage ($U_{dc,r}$)			350 V		
Max. input voltage ($U_{dc \max}$)			850 V		
MPP voltage range ($U_{mpp \min} - U_{mpp \max}$)			350 V - 700 V		
Number of DC inputs			6		


OUTPUT DATA	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
AC nominal output ($P_{ac,r}$)	3,000 W	3,680 W	4,000 W	4,600 W	4,600 W ¹⁾ / 5,000 W
Max. output power	3,000 W	3,680 W	4,000 W	4,600 W	5,000 W
Max. output current ($I_{ac \max}$)	13.0 A	16.0 A	17.4 A	20.0 A	21.7 A
Grid connection ($U_{ac,r}$)			1-NPE 230 V		
Min. output voltage ($U_{ac \min}$)			180 V		
Max. output voltage ($U_{ac \max}$)			270 V		
Frequency (f_r)			50 Hz / 60 Hz		
Frequency range ($f_{\min} - f_{\max}$)			46 Hz - 65 Hz		
Distortion factor (50 Hz / 60 Hz)			< 3% / < 3.5%		
Power factor ($\cos \varphi_{ac,r}$)			1		

¹⁾ Fronius IG TL 5.0 devices destined for Germany, Austria, Belgium and the Czech Republic have an AC nominal output of 4,600 W.


GENERAL DATA	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
Dimensions (height x width x depth)			597 x 413 x 195 mm		
Weight			19.1 kg		
Degree of protection			IP 45 ²⁾		
Protection class			1		
Overvoltage category (DC / AC)			2 / 3		
Night-time consumption			< 1 W		
Inverter concept			Transformerless		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			from -20°C - +55°C		
Permitted humidity			0% - 95%		
DC connection technology			Screw terminal connection 2.5 mm ² - 16 mm ²		
AC connection technology			Screw terminal connection 2.5 mm ² - 16 mm ²		
Certificates and compliance with standards	DIN V VDE V 0126-1-1, ÖVE/ÖNORM E 8001-4-712, UTE C15-712-1, EN 50438, G83, G59, C 10 / 11, CER 06-190, Guida per le connessioni alla rete elettrica di ENEL Distribuzione, AS 4777-1, AS 4777-2, AS 4777-3				

²⁾ Please refer to the information in the operating instructions regarding correct installation of the inverter.

FRONIUS IG TL 5.0 EFFICIENCY CURVE

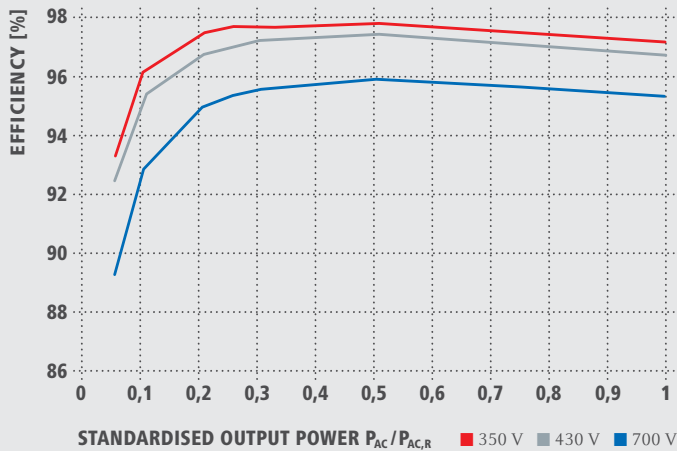

FRONIUS IG TL TEMPERATURE DERATING

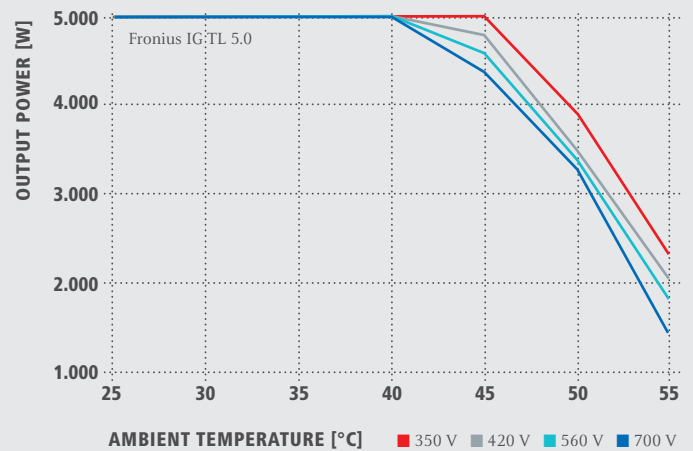

TECHNICAL DATA: FRONIUS IG TL

EFFICIENCY	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
Max. efficiency	97.7 %	97.7 %	97.7 %	97.7 %	97.7 %
European efficiency (η_{EU})	97.1 %	97.2 %	97.3 %	97.3 %	97.3 %
η at 5% $P_{AC,R}^{(3)}$	92.1 / 87.8 %	92.6 / 88.3 %	92.9 / 88.6 %	93.1 / 89.1 %	93.4 / 89.4 %
η at 10% $P_{AC,R}^{(3)}$	94.2 / 90.2 %	95.3 / 91.2 %	95.7 / 91.8 %	96.0 / 92.6 %	96.1 / 92.9 %
η at 20% $P_{AC,R}^{(3)}$	96.6 / 93.6 %	96.9 / 94.2 %	97.2 / 94.5 %	97.3 / 94.8 %	97.4 / 94.9 %
η at 25% $P_{AC,R}^{(3)}$	97.0 / 94.3 %	97.2 / 94.7 %	97.4 / 94.9 %	97.5 / 95.2 %	97.6 / 95.3 %
η at 30% $P_{AC,R}^{(3)}$	97.3 / 94.7 %	97.4 / 95.1 %	97.5 / 95.2 %	97.6 / 95.4 %	97.6 / 95.5 %
η at 50% $P_{AC,R}^{(3)}$	97.6 / 95.5 %	97.6 / 95.7 %	97.7 / 95.7 %	97.7 / 95.8 %	97.7 / 95.8 %
η at 75% $P_{AC,R}^{(3)}$	97.6 / 95.8 %	97.6 / 95.8 %	97.5 / 95.7 %	97.4 / 95.7 %	97.4 / 95.6 %
η at 100% $P_{AC,R}^{(3)}$	97.5 / 95.7 %	97.4 / 95.6 %	97.3 / 95.5 %	97.2 / 95.4 %	97.0 / 95.2 %
MPP adaptation efficiency	> 99.9 %				

³⁾ and at $U_{MPP\ min} / U_{MPP\ max}$

PROTECTIVE EQUIPMENT	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
DC insulation measurement	Universal current-sensitive fault monitoring				
Overload behaviour	Operating point shift, power limitation				
DC circuit breaker	Integrated				

INTERFACES	IG TL 3.0	IG TL 3.6	IG TL 4.0	IG TL 4.6	IG TL 5.0
USB A socket	For USB sticks ⁴⁾ with max. dimensions of 80 x 33 x 20 mm (l x w x h)				
Signalling output	2-pin screw terminal, 12 V max. 300 mA				
Two RJ45 sockets (RS485)	Fronius Solar Net interface, interface protocol				

⁴⁾ Please refer to the information in the operating instructions regarding the use of USB sticks (temperature range).

/ Battery Charging Systems / Welding Technology / Solar Electronics

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS.

/ Whether Battery Charging Systems, Welding Technology or Solar Electronics - our goal is clearly defined: to be the technology and quality leader. With more than 3,000 employees worldwide, we shift the limits of what's possible - our 650 active patents are testimony to this. While others progress step by step, we innovate in leaps and bounds. Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com.



v01 2011 EN

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv@fronius.com
www.fronius.com