


# Sunmodule<sup>®</sup> Bisun protect 280 clear



Data sheet

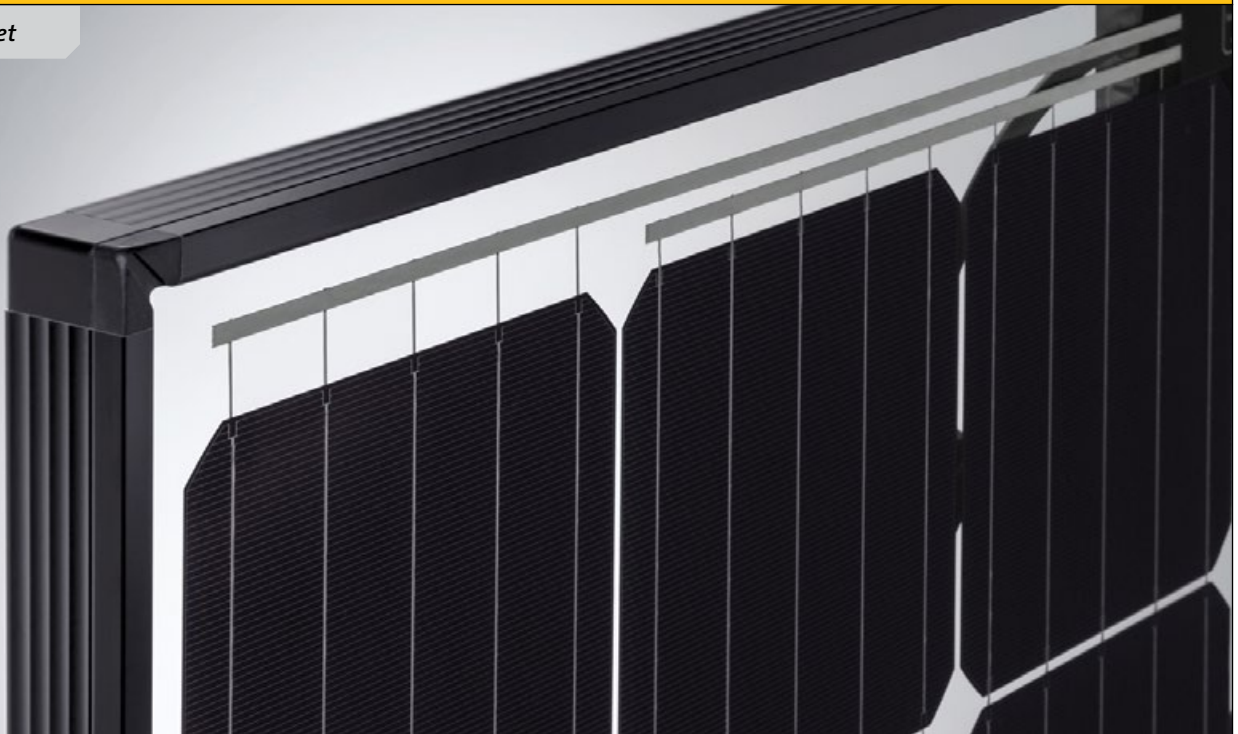

## HIGH QUALITY ENGINEERING BY SOLARWORLD

More than 40 years of technology expertise, ongoing innovation and continuous optimization create the foundation for the performance of SolarWorld's high-quality modules. All production steps, from silicon to module, are established at our production sites, ensuring the highest quality for our customers every step of the way. Our modules are extremely flexible when it comes to their application and provide optimal solutions for installation and non-stop performance – worldwide.

- » Up to 25 % more yield thanks to highly-efficient bifacial cell technology – light from all directions is transformed into power through the active rear side of the module
- » Extremely long service life and optimized protection from mechanical stress and environmental conditions thanks to the use of glass on the front and back of the module
- » Especially stable, despite its low weight mechanical resilience of up to 8.5 kN/m<sup>2</sup>
- » Tested in extreme weather conditions – resistance to salt spray, frost and hail-proof, resistance to ammonia, dust and sand
- » PID-resistant and proven hotspot guarantee
- » Highly-efficient cells (mono PERC) for the highest possible yields
- » Harmonized components such as mounting systems,
- » Patented corner design with integrated drainage for optimized self-cleaning.
- » High-transmissive front glass and anti-reflective coating.
- » Long-term safety and guaranteed top performance – At least 97% of nominal power in the first year – 30-year linear performance warranty 20-year product warranty.



# Sunmodule<sup>®</sup> Bisun protect 280 clear



## PERFORMANCE UNDER OPTIMIZED CONDITIONS

		6 %	10 %	20 %	25 %
<b>Energy boost</b>					
<b>Maximum power</b>	$P_{max}$	296 Wp	306 Wp	331 Wp	344 Wp
<b>Open circuit voltage</b>	$U_{oc}$	39.60 V	39.60 V	39.60 V	39.60 V
<b>Maximum power point voltage</b>	$U_{mpp}$	32.10 V	32.00 V	31,80 V	31.70 V
<b>Short circuit current</b>	$I_{sc}$	9.96 A	10.34 A	11.28 A	11.75 A
<b>Maximum power point current</b>	$I_{mpp}$	9.21 A	9.56 A	10.43 A	10.86 A
<b>Module efficiency</b>	$\eta_m$	17.64 %	18.25 %	19.77 %	20.52 %

## PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)\*

<b>Maximum power</b>	$P_{max}$	280 Wp
<b>Open circuit voltage</b>	$U_{oc}$	39.5 V
<b>Maximum power point voltage</b>	$U_{mpp}$	31.8 V
<b>Short circuit current</b>	$I_{sc}$	9.49 A
<b>Maximum power point current</b>	$I_{mpp}$	8.95 A
<b>Module efficiency</b>	$\eta_m$	16.70 %

Measuring tolerance ( $P_{max}$ ) +/- 2 %

\*STC: 1000 W/m<sup>2</sup>, 25° C, AM 1.5

## PERFORMANCE AT 800 W/m<sup>2</sup>, NOCT, AM 1.5

<b>Maximum power</b>	$P_{max}$	212,5 Wp
<b>Open circuit voltage</b>	$U_{oc}$	36.6 V
<b>Maximum power point voltage</b>	$U_{mpp}$	29.4 V
<b>Short circuit current</b>	$I_{sc}$	7.77 A
<b>Maximum power point current</b>	$I_{mpp}$	7.23 A
<b>Module efficiency</b>	$\eta_m$	12.67 %

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m<sup>2</sup>, 97% (+/-3%) of the STC efficiency (1000 W/m<sup>2</sup>) is achieved.

## PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

<b>Power sorting</b>	-0 Wp / +10 Wp
<b>Maximum system voltage IEC/ NEC</b>	1000 V / 1000 V
<b>Maximum reverse current</b>	25 A
<b>Number of bypass diodes</b>	3
<b>Operating range</b>	-40°C - +85°C
<b>Maximum Design Loads (Two rail system)*</b>	+5.4 kN/m <sup>2</sup> / -3.1 kN/m <sup>2</sup>
<b>Maximum Design Loads (Three rail system)*</b>	+8.5 kN/m <sup>2</sup> / -3.1 kN/m <sup>2</sup>

\*Please refer to the Sunmodule Installation instructions for the details associated with these load cases.

## COMPONENT MATERIALS

<b>Cells per module</b>	60
<b>Cell type</b>	bifacial duo
<b>Cell dimensions</b>	156 mm x 156 mm
<b>Front</b>	Heat strengthened glass (EN 1863-1)
<b>Back</b>	Heat strengthened glass (EN 1863-1)
<b>Frame</b>	Black anodized aluminum
<b>J-Box</b>	IP65
<b>Connector</b>	Amphenol H4 UTX

## DIMENSIONS / WEIGHT


<b>Length</b>	1675 mm
<b>Width</b>	1001 mm
<b>Height</b>	33 mm
<b>Weight</b>	21.5 kg

## THERMAL CHARACTERISTICS

<b>NOCT</b>	46 °C
<b>TK <math>I_{sc}</math></b>	0.060 %/K
<b>TK <math>U_{oc}</math></b>	-0.29 %/K
<b>TK <math>P_{mpp}</math></b>	-0.40 %/K

## ORDERING INFORMATION

Order number	Description
82000252	Sunmodule Bisun protect 280 clear

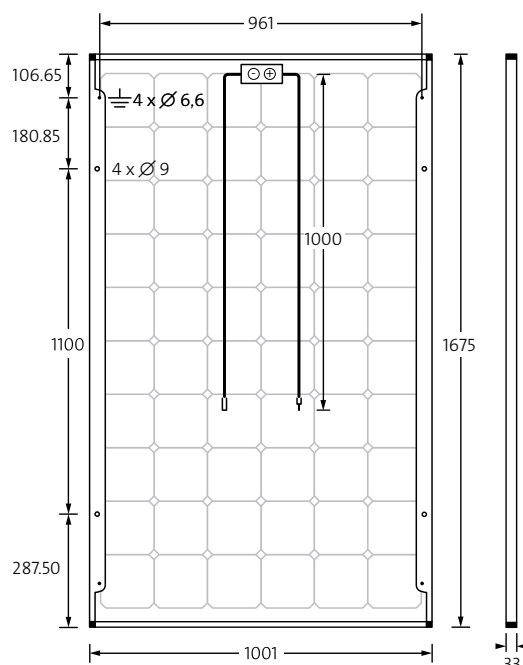

## CERTIFICATES AND WARRANTIES

<b>Certificates</b>	IEC 61730	IEC 61215	UL 1703
	IEC 62716	IEC 60068-2-68	IEC 61701
<b>Warranties</b>	Product Warranty	20 years	
	Linear Performance Guarantee	30 years	